


How to Connect Texas Hunter's EZSet Timer to a Grounded Feeder

1. Disconnect the Grounded Wire connected to feeder's funnel.
2. Extend this wire 6 to 12 inches using 16-gauge wire.
3. Run the extended wire through the funnel down into the timer compartment.
4. Connect both motor wires to the orange and white motor wires on the universal adapter provided with the timer. Note: The feeder motor wires can be connected to the orange and/or white timer wires in any configuration (i.e.; black to orange, the motor will spin either clockwise or counter-clockwise...if connected the other way, the motor will spin in the opposite direction).



How to Connect a Grounded Solar Charger to the EZSet Timer

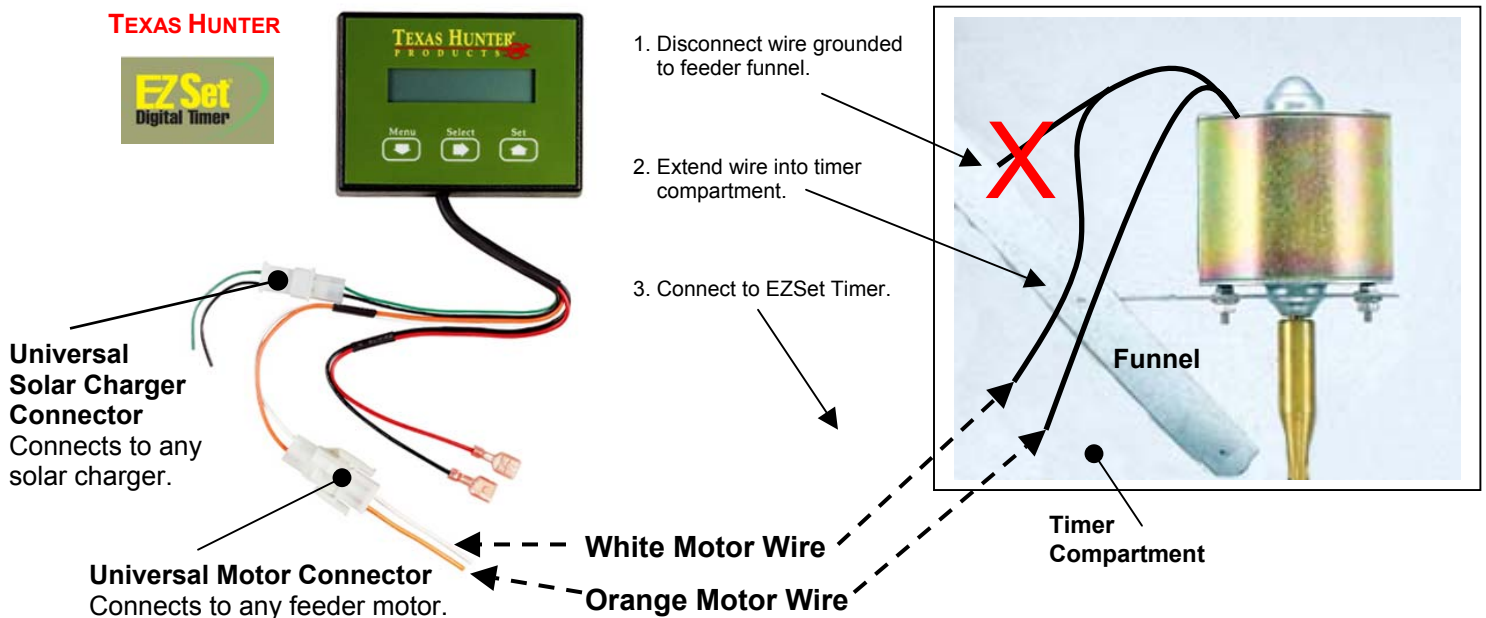

Disconnect the grounded wire from the feeder and extend and connect to the BLACK wire on Texas Hunter's universal solar connector. Then connect the other solar panel wire to the GREEN wire on the solar connector. The timer will flash 'Charging' when the connection is correct and exposed to direct sunlight.

TEXAS HUNTER PRODUCTS

4242 IH 10 East • San Antonio • Texas • 78219 • (800) 969-3337 • Info@TexasHunterProducts.com